

RIVERCREST® FIRE PIT

UNILOCK®

TECH SHEET

THICKNESS 405MM

REGION ONTARIO



UNILOCK® Exclusive Technologies

REALA™



APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.



Fire Feature

COLORS


BUFF **FINISH: FLAGSTONE**



ROUND W/GRILL & INSERT

0mm x 1,370mm x 405mm
0" x 53 7/8" x 15 7/8"

COASTAL SLATE **FINISH: FLAGSTONE**




ROUND W/GRILL & INSERT

0mm x 1,370mm x 405mm
0" x 53 7/8" x 15 7/8"

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

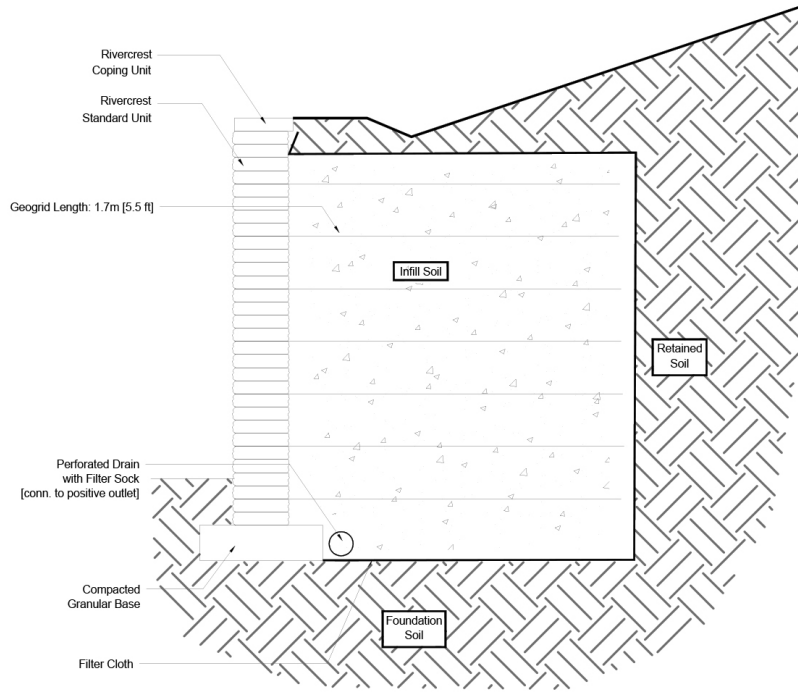

PACKAGING

	ROUND W / GRILL & INSERT
UNIT THICKNESS (MM)	405
LAYERS PER BUNDLE	3
UNITS PER BUNDLE	36
UNITS PER LAYER	12

INSTALLATION NOTES

Rivercrest Fire Pit

Standard Base – Min. 6” – 8” of ¾” Crusher Run gravel (any road base standard in accordance with ASTM-D2940) compacted to 98% Standard Proctor Density (SPD).

Levelling – Leveling Rivercrest fire pit kits directly on top of gravel is tedious and generally does not yield the best results. U-Grip™ Base units or universal base pads are recommended under all Unilock walls for improved accuracy and makes for a speedier installation. Additional benefits include long term structural integrity and an overall better appearance. Poured concrete leveling pads, reinforced with rebar, are also a great way to accomplish leveling, especially for larger installations. You must ensure that the concrete is poured and finished perfectly in order to achieve a good visual appearance.

Connection – Fire pit wall units must be glued using an appropriate high heat concrete adhesive for connection between units. Always read adhesive manufacturers’ directions prior to gluing.

Handling – Handle wall units with care when installing. Bumping units into one another may chip the face.

Coping – No coping is required for the Rivercrest fire pit.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated November 19, 2024, 8:13 am

UNILOCK